




PRECISION OIL
LABORATORIES



A PASSION FOR OILS

SAMPLING GUIDE

1. BEFORE SAMPLING, MAKE SURE THAT YOU ARE SAMPLING FROM A HOMOGENOUS (WELL-MIXED) BATCH.
2. SAMPLE YOUR OIL OR FAT PRODUCT IN AN CONTROLLED ENVIRONMENT ENSURING THAT THE SAMPLED PRODUCT IS MINIMALLY EXPOSED TO OXYGEN, LIGHT AND HEAT.
3. TIGHTLY SEAL YOUR SAMPLED PRODUCT IN A GLASS AMBER BOTTLE WITH MINIMUM TO NO HEADSPACE TO ENSURE STABILITY UNTIL TESTING.
4. IDEALLY DUPLICATE SAMPLES MUST BE SUBMITTED TO THE LABORATORY FOR TESTING.
5. ENSURE THAT YOUR SAMPLE IS WRAPPED AND PACKED SECURELY BEFORE SHIPPING.

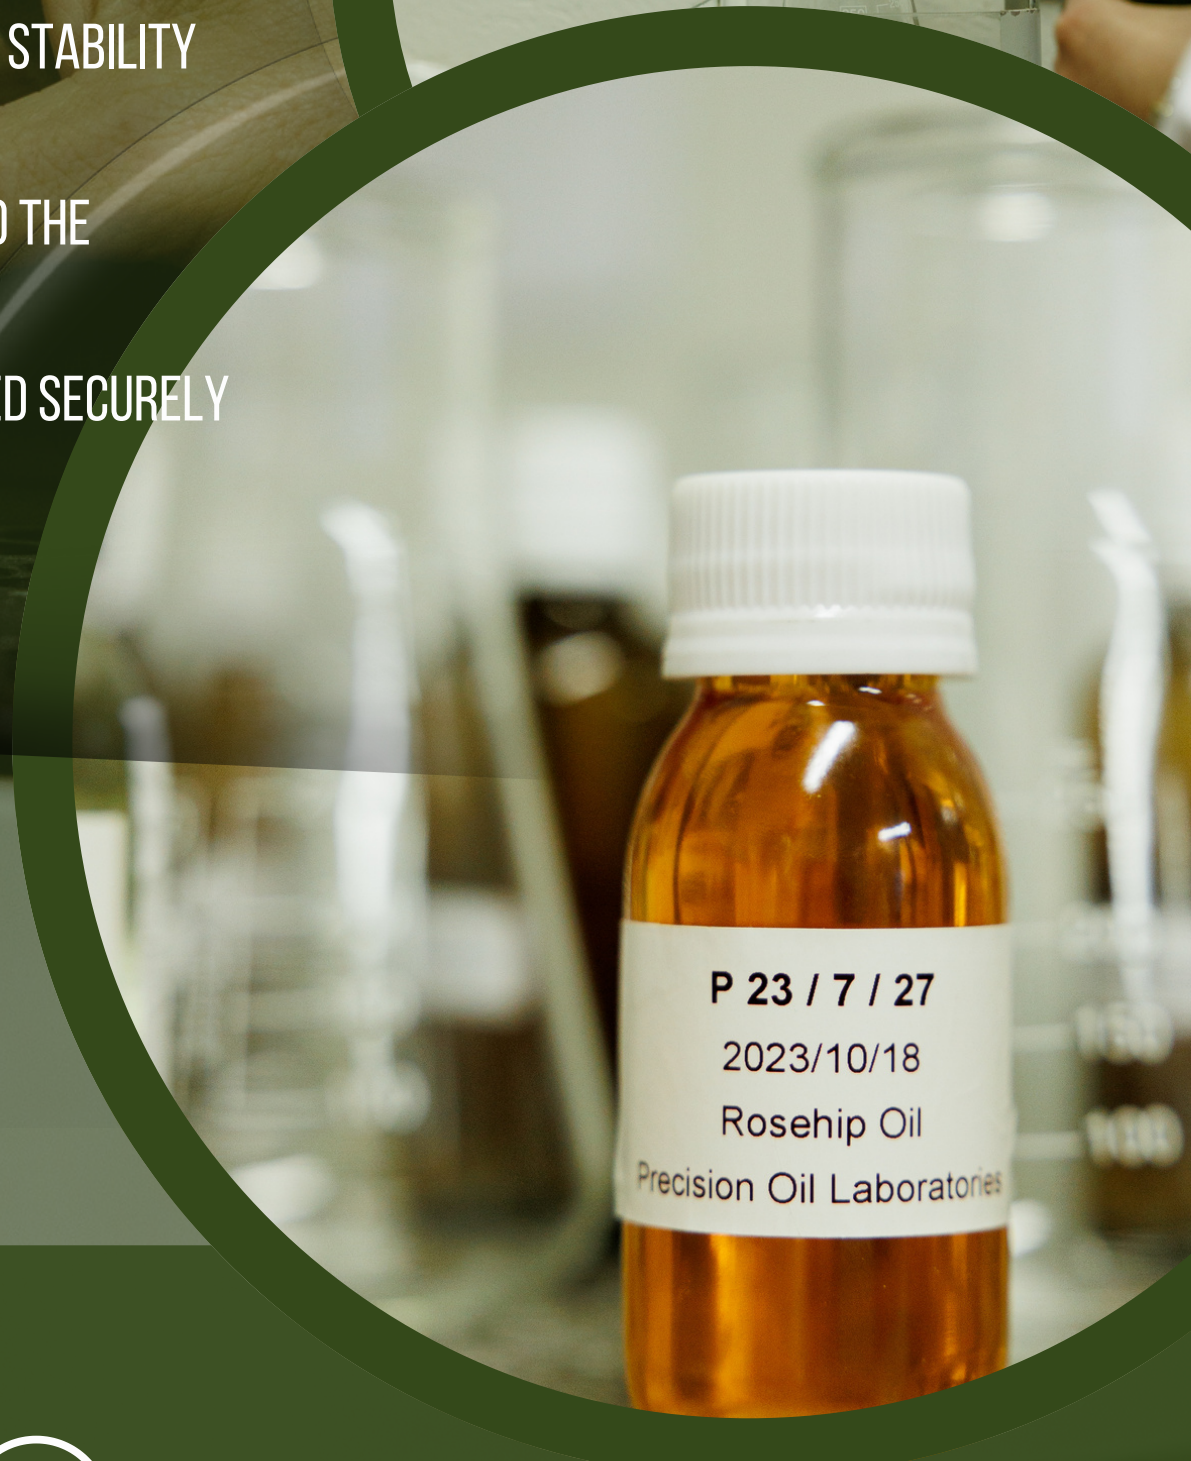

Upon arrival samples are inspected for any leakage or breakage. After sample analysis is completed, samples shall be retained for 3 months in a controlled environment and discarded afterwards. Important note: Please contact laboratory analysts for guidance on the amount of sample needed for the requested testing. Personnel contact information can be located on our 'About us' page or on our Service Request.



Tel: 015 004 0010
Mobile: 072 491 6044



Info@precisionoils.co.za